

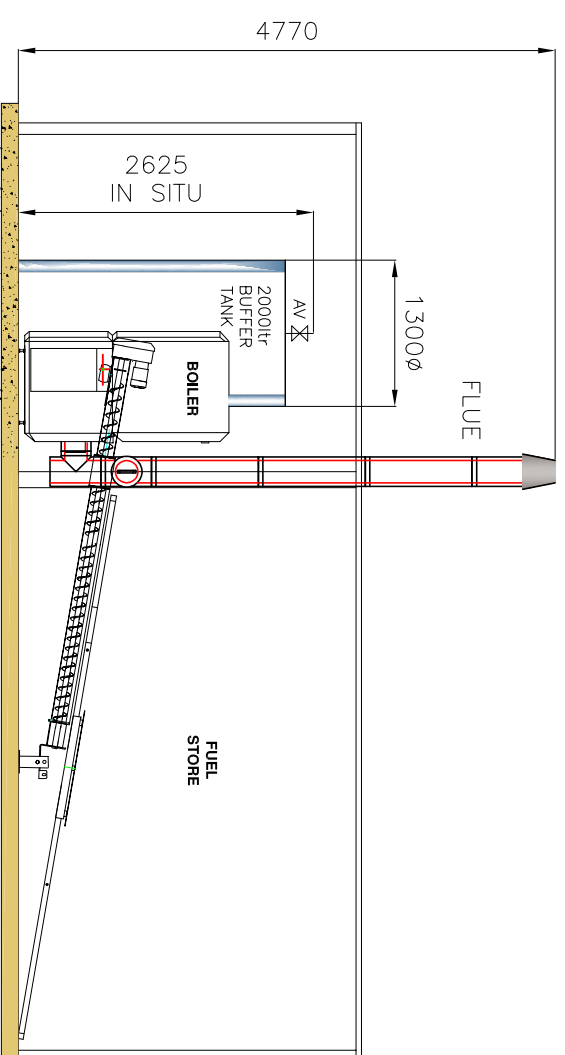


ELEVATION VIEW OF WALL DETAIL IN BLOCKWORK. ALLOWANCE MUST BE MADE FOR INSTALLATION OF AUGER DRIVE AND 8'x4' PLY SHEETS. N.I.S.

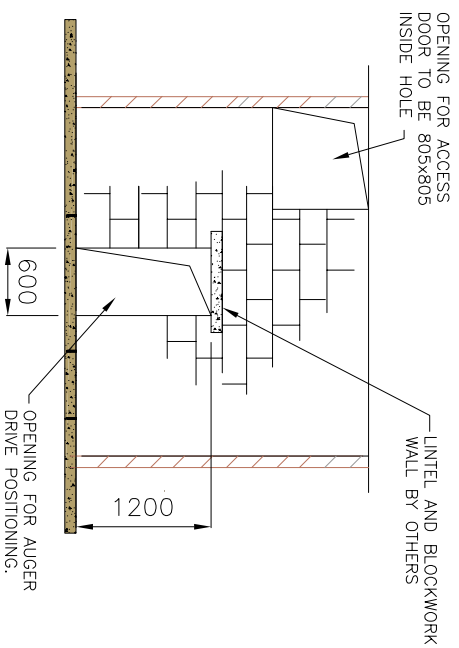

SIDE WALL LEFT OPEN FOR BIOMASS EQUIPMENT PLACEMENT

MAINS ENTRY, PUMPS, METER ETC.

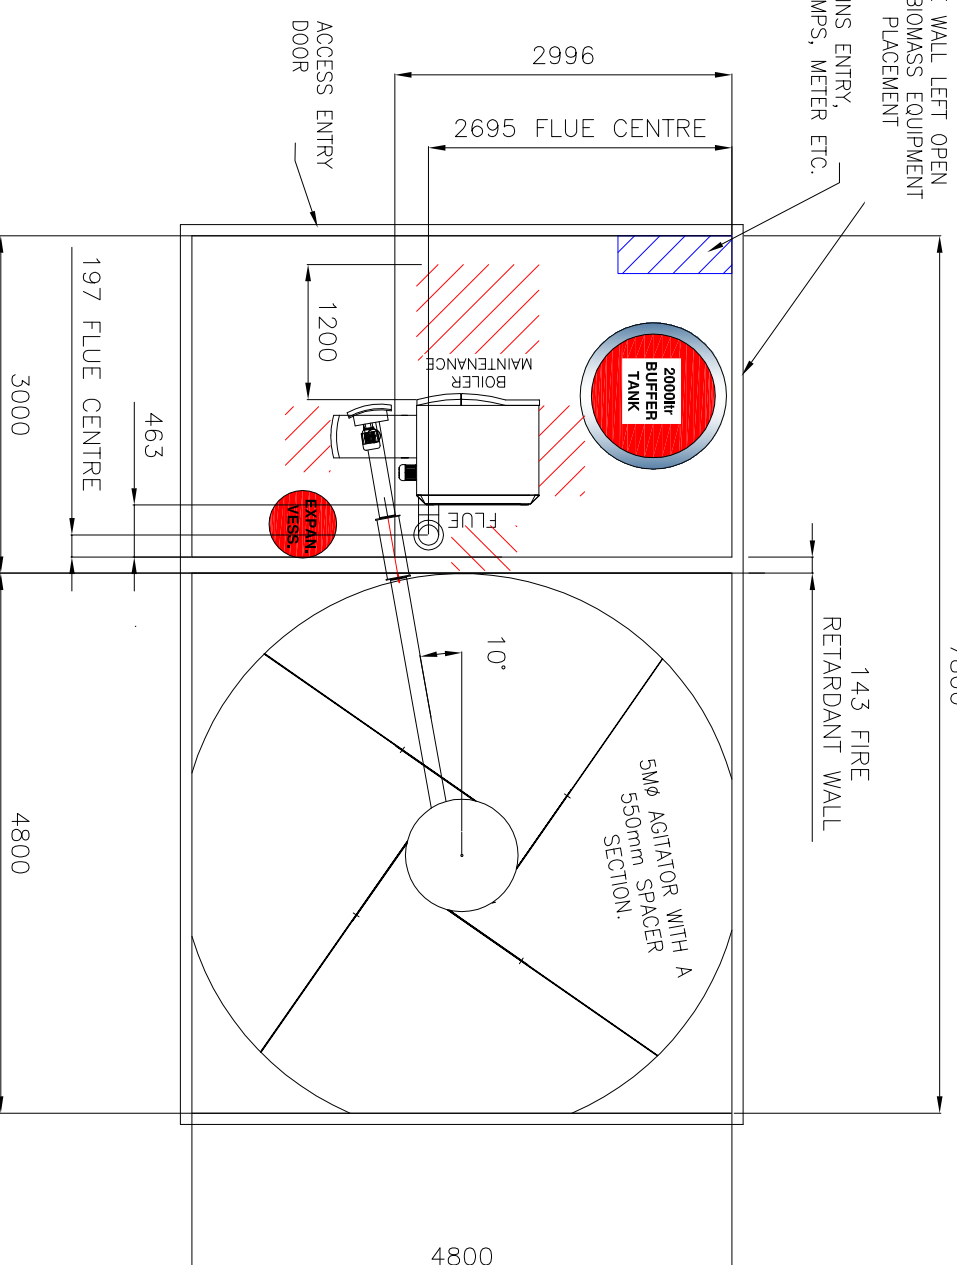

UNLESS NOTED OTHERWISE ALL DIMENSIONS ARE IN MILLIMETRES & ALL LEVELS ARE IN METRES AOD.

**NOTES:**

BOILER AND AUGER SHIPPING WEIGHTS ARE A TOTAL OF 1200kg.

THE DRY WEIGHT OF THE BUFFER TANK IS 400kg DRY AND 2400 kg WET.

FOR REFERENCE THE MAXIMUM REQUIRED POINT LOAD WILL BE AT THE POINT OF THE BOILER.

THE POINT LOAD AT THIS PARTICULAR LOCATION WILL BE 2.15KN/cm<sup>2</sup>.

THE BOILER WEIGHS APPROX. 860KG AND IS SUPPORTED VIA 4 No M12 BOLTS, HENCE 2.157 KN/M12 BOLT.

C	-	-	-	-	-
B	-	-	-	-	-
A	FIRST ISSUE	RJC	-	-	07/12/12
MK	REVISIONS	DRN	CHK	APP	DATE

**HOLLYFIELD SITE B**

100kW GUNTAMATIC POWERCHIP  
BOILER WITH 2000 ltr BUFFER TANK  
BOILER HOUSE & FUEL STORE

**PRELIMINARY**

ORIGINAL DRAWING SIZE A3 SCALE SEE DRWG

DRAWING NUMBER  
HOLLYFIELD/003

REV.  
A



TRECO Ltd,  
6 Millennium Place,  
Tiverton Business Park,  
Tiverton,  
Devon,  
EX16 6SB  
Tel: 0845 1 30 90 12  
Web : www.treco.co.uk  
e-mail : info@treco.co.uk